


D/GR	REFERENCE	C	BS	XC	XS	XV	SPEC
S No	TYPE FRAME FLOPM						
4 01	CX M182TY S	12 05	.94	12 30	1 18	2 56 (3,5,7 1/2 HP)	59745
4 02	SC M184TY S	12 05	.94	12 30	1 18	2 56 (5,7 1/2 10 HP)	59756
4 03	CX Y182TY S	12 55	.94	13 30	1 18	2 56 (10 HP)	59745

DO NOT SCALE DRAWING

NOTE 1) FOR USE WITH IMO PUMP SERIES E45 SIZE 025, 032 & 038 MOUNTED ON FLANGE 131672 SUPPLIED BY CUSTOMER

2) TWO BOTTOM CUSTOMER MOUNTING HOLES ON A 7.48" Ø BOLT CIRCLE TO BE EQUIDISTANT FROM PLANE FORMED BY BOTTOM OF BASE WITHIN .089"

3) MOTOR THRU-BOLTS MUST NOT EXTEND THROUGH ADAPTER PLATE.

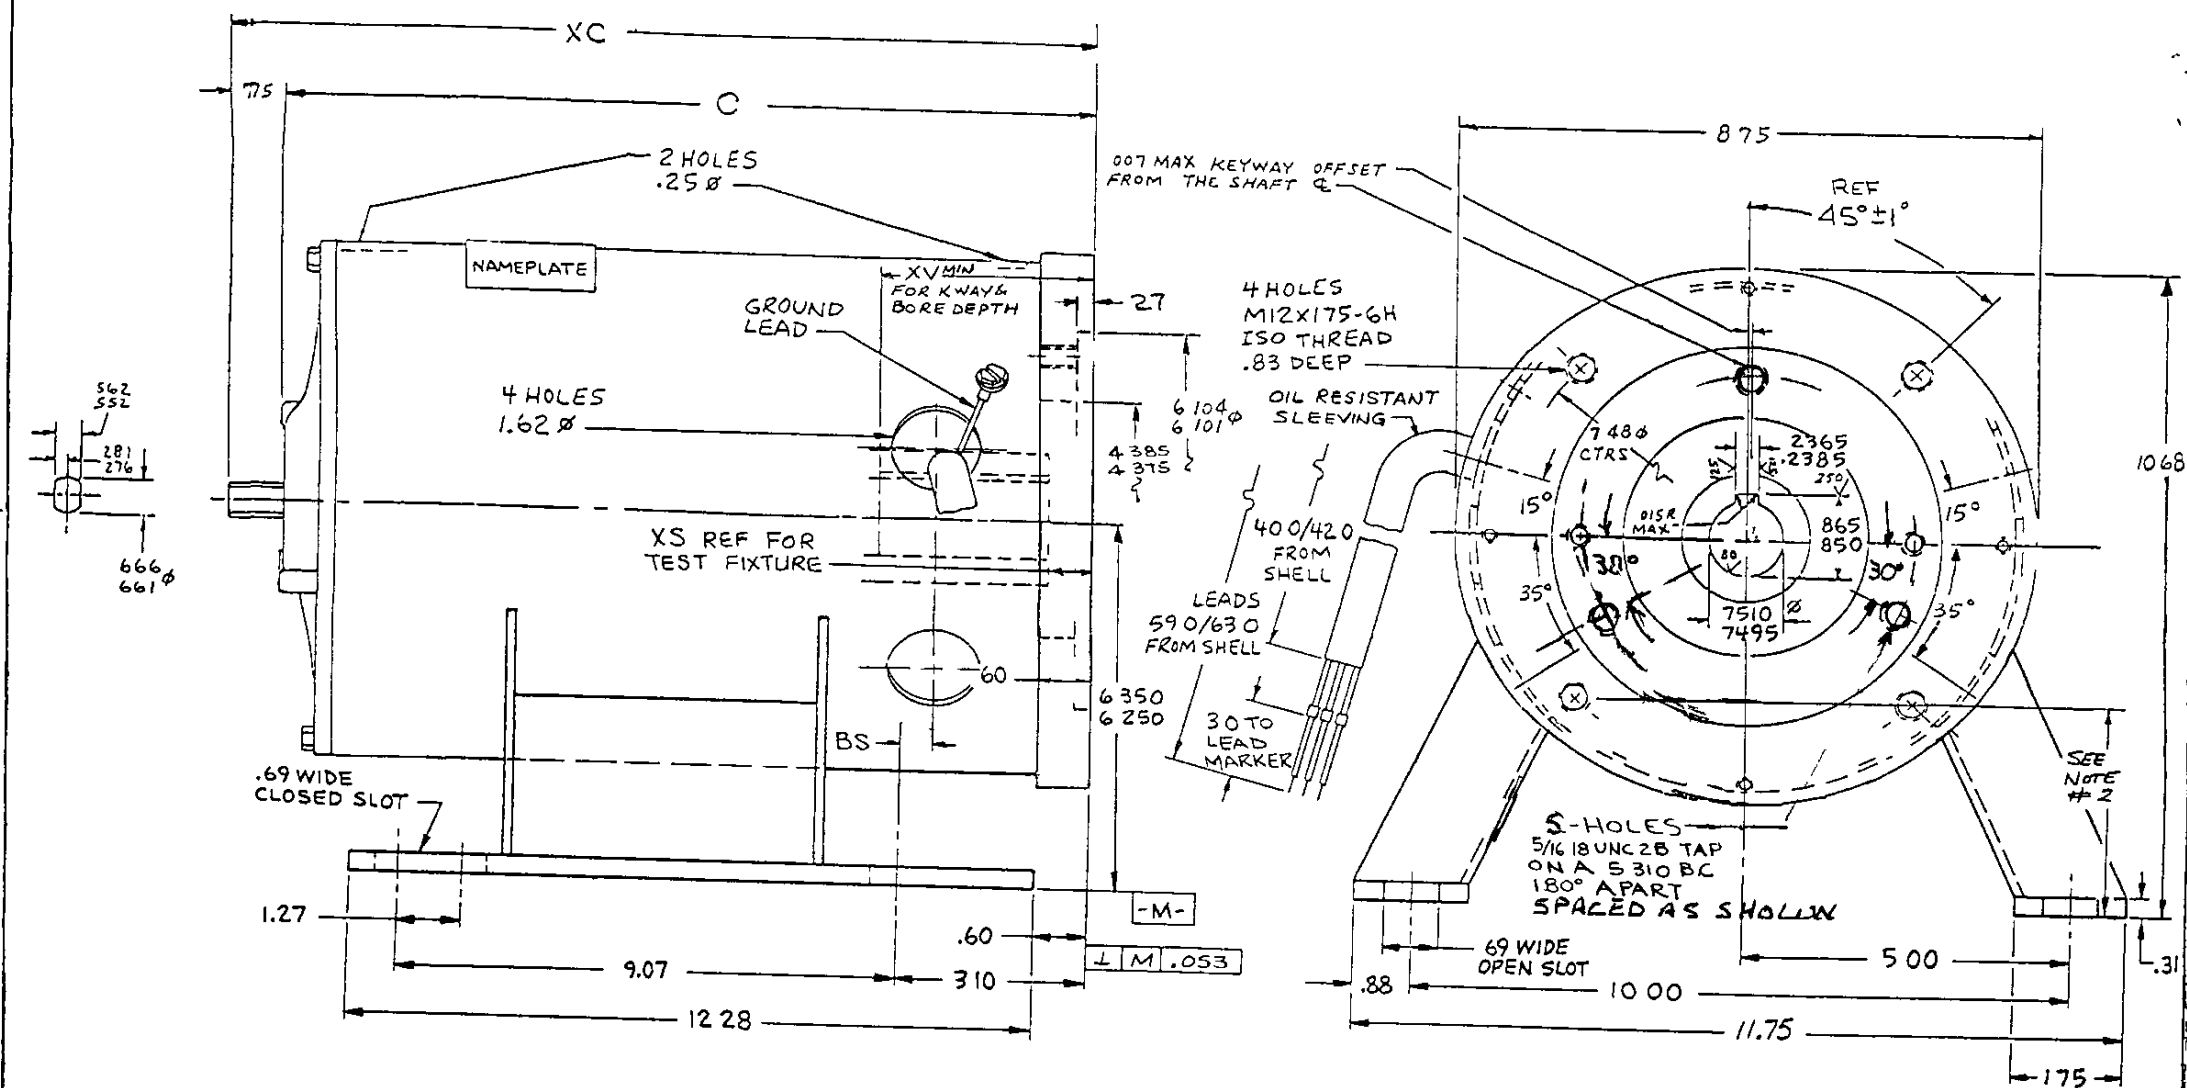

SIM TO 359486

31 ADDED 3 MTG HOLES
PER ECN 00M16884.
TW/JMW 2-23-00

REV	DATE	BY	CHKD	APPD
1	7/16/06			
2	4/30/06			
3	4/30/06			
4	4/30/06			
5	4/30/06			
6	4/30/06			
7	4/30/06			
8	4/30/06			
9	4/30/06			
10	4/30/06			

TH RD ANGLE PROJECTION	Century Electric, Inc. 1831 Chestnut Street, St. Louis, Missouri 63103	CENTURY
	1801 DWG 0 LINE BB OPEN SPECIAL FACE MTG & BASE	
DWG NO 77-88	REV 1	DATE 7/19/88
APPD NONE	5	359924
	c	1920

DATE

2) Two Bottom Customer Mounting Holes On A 7.48 in Bar Circle
To Be Eliminated From Plant Layout By Cutting Of Bar

3) MOTOR THRU-BOLTS MUST NOT EXTEND THROUGH ADAPTER PLATE.



4. 05

STAGGERS FIGHT POWER
PER EAM 000116 004.
TULY J. W. 2-23-00

TO: ALL	FROM: ALL	DATE: 5	TIME: 0800
SUBJECT: 1807 DWG. G LINE BA OPEN			
ACTION: SPECIAL FACC MFG 2 BASE			
QTY: 5	UNIT: 553924	CLASS: C	STATUS: 18